

PURELLO FIX & CLIC RIGID SPC

Modern flooring for a practical lifestyle



PURELLO	FIX 30	FIX 30 V	FIX 55 V	CLIC 30 V silento
Flooring type	glue-down	glue-down	glue-down	with acoustic underlay
Classification	23 – 31	23 – 31	33 – 42	23 – 31
Locking system	–	–	–	Uniclic
Total thickness	2,5 mm	2,5 mm	2,5 mm	4 + 1 mm
Wear layer	0,30 mm	0,30 mm	0,55 mm	0,30 mm
Dimensions	304 x 609 mm 470 x 1000 mm	178 x 1219 mm	178 x 1219 mm	178 x 1219 mm
Weight	4,61 kg/m ²	4,61 kg/m ²	4,61 kg/m ²	8,30 kg/m ²
Packaging	18 pcs / 3,34 m ² 6 pcs / 2,82 m ²	18 pcs / 3,90 m ²	18 pcs / 3,90 m ²	10 pcs / 2,17 m ²
Thermal resistance	0,0174 m ² K/W	0,0174 m ² K/W	0,0174 m ² K/W	0,0278 m ² K/W (including acoustic underlay)



EN 14041: 2004

PURELLO FIX & CLIC RIGID SPC



FIX 30 V 31128 | **CLIC 30 V silento 35128** | skirting board
FIX 55 V 51128 | 2004



FIX 30 V 31129 | **CLIC 30 V silento 35129** | skirting board
FIX 55 V 51129 | 2661



FIX 30 V 31117 | **CLIC 30 V silento 35117** | skirting board
4049



FIX 30 V 31116 | **CLIC 30 V silento 35116** | skirting board
FIX 55 V 51116 | 2567



FIX 30 V 31115 | **CLIC 30 V silento 35115** | skirting board
2035



FIX 30 V 31143 | **CLIC 30 V silento 35143** | skirting board
FIX 55 V 51143 | 2586



FIX 30 V 31135 | **CLIC 30 V silento 35135** | skirting board
3629



FIX 30 V 31120 | **CLIC 30 V silento 35120** | skirting board
3597



FIX 30 V 31141 | **CLIC 30 V silento 35141** | skirting board
3624



FIX 30 V 31131 | **CLIC 30 V silento 35131** | skirting board
2332



FIX 30 V 31118 | **CLIC 30 V silento 35118** | skirting board
FIX 55 V 51118 | 3776



FIX 30 V 31138 | **CLIC 30 V silento 35138** | skirting board
2726



FIX 30 V 31126 | **CLIC 30 V silento 35126** | skirting board
FIX 55 V 51126 | 2626



FIX 30 V 31144 | **CLIC 30 V silento 35144** | skirting board
FIX 55 V 51144 | 4050




FIX 30 V 31110 | **CLIC 30 V silento 35110** | skirting board
3600




FIX 30 V 31124 | **CLIC 30 V silento 35124** | skirting board
3470



FIX 30 V 31155 | **CLIC 30 V silento** 35155 | skirting board
FIX 55 V 51155 | 3612

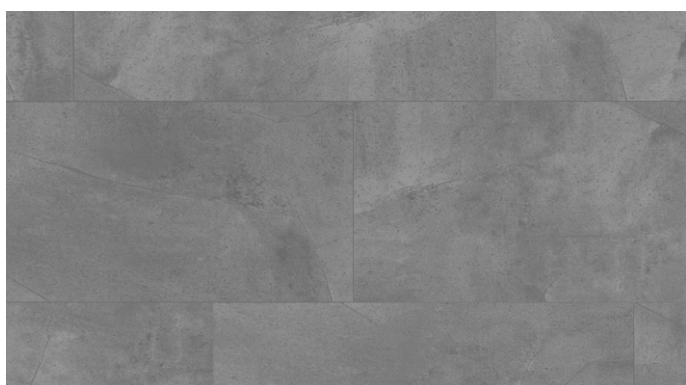


FIX 30 31195 (30 x 61 cm) | skirting board
 1473

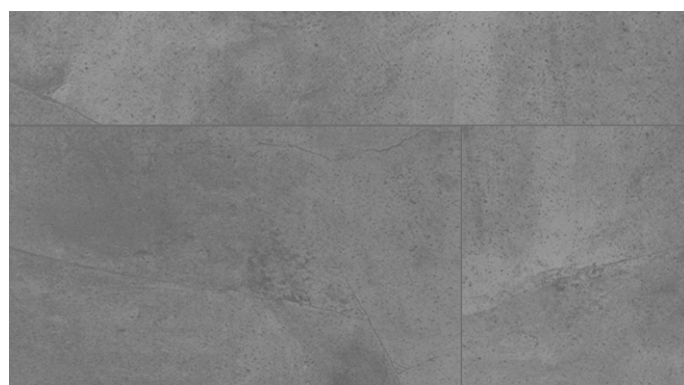

FIX 30 131195 (47 x 100 cm) | skirting board
 1473

Accessories



Skirting board CUBU Pu60

- in PURELLO flooring shades
- Dimensions: 60 x 13 x 2500 mm




MAMUT GLUE adhesive

- For gluing skirting boards
- Packaging: cartridge 290 ml
- Consumption:
approx. 1 cartridge / 15 - 20 m



SCHÖNOX Durocoll adhesive

- For bonding PURELLO FIX
- Packaging: 3 kg and 14 kg
- Consumption:
approx. 1 kg / 4 m²



Adhesive spreader TKB A2 - 18 cm

- For even application and
dispensing of adhesive

Modern flooring for a practical lifestyle



PURELLO

FIX 30 / 30 V / 55 V



Tiles with high dimensional accuracy are made with standard LVT technology from multiple layers of vinyl.

For a gluedown installation on prepared base Schönox Durocol adhesive is recommended.

PURELLO

CLIC 30 V silento RIGID SPC



Rigid planks with high dimensional accuracy are made with the most modern extruded RIGID SPC technology from pure vinyl and limestone. Planks are **dimensionally accurate** even with significant changes in flooring temperatures.

Silento - integrated underlay from acoustic foam of 1 mm height easily adheres to the smooth base (no additional underlays needed).

Patented **Uniclic** locking system is **very precise and strong**. Planks are being easily and quickly installed as a floating floor with no need for fixation.



Excellent price quality ratio

PURELLO vinyl floors achieve **superior quality** compared to usual offer on the market.



Healthy environment

PURELLO vinyl floors fulfill hygienic requirements of valid European standards. Does not contain any recycled materials or **phthalate plasticizers**.



Long lifetime and easy maintenance

PURELLO vinyl flooring is **even more durable and easier to clean** thanks to PUR surface treatment, saving water consumption, energies and cleaning agents in the process.



Authentic decors

PURELLO decors have natural wooden appearance with **perfect reproduction of oak trees** in both natural and trending shades. The fine surface embossing together with slightly beveled edges enhance true illusion of natural design.



Very low thermal resistance

PURELLO vinyl tiles do not prevent heat transfer from **floor heating**. When installing on heated floors, the usual principles are being applied.



Proven areas of use

PURELLO vinyl tiles are suitable for all types of **high-traffic residential areas and commercial areas with moderate-traffic**.

PURELLO FIX & CLIC RIGID SPC

